


Crank link Drive chain

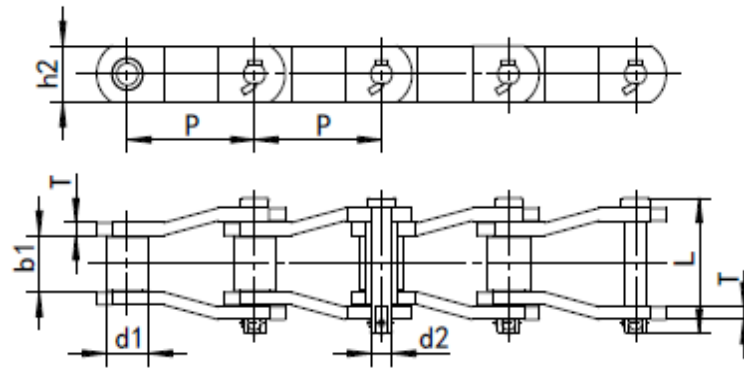

ZMIE Chain No.	Pitch	Roller diameter	Inner width	Pin diameter	Pin length	Plate depth	Plate thickness	Ultimate tensile strength	Weight per meter
	P	d1 max	b1 min	d2 max	L max	h2 max	T max	Q min	q
	mm	mm	mm	mm	mm	mm	mm	KN	kg/m
SS2065	50.8	28.6	32.5	15.1	79.50	38.0	7.9	220.00	12.14
MXS882	66.3	22.2	28.6	11.1	68.50	28.5	6.4	115.00	5.30
2512	77.9	41.3	39.6	19.1	100.00	57.0	9.7	340.00	18.40
2184	152.4	76.2	35.0	22.2	76.00	50.8	9.5	330.00	18.17
SS1245	103.5	45.2	49.6	23.8	129.40	60.0	14.5	550.00	31.19
6024	152.4	76.2	76.2	38.1	186.00	101.6	19.1	1600.00	69.00